


**PRODUCT NAME:**

VELCRO DISCS 125MM C/W HOLES

**PRODUCT CODE/S:**

**PREPACKED 5 PER PACK:** PPA024, PPA025, PPA026, PPA027  
**50 PER PACK 125MM:** AD130, AD131, AD132, AD133, AD134, AD135, AD136, AD137, AD138, AD139  
**50 PER PACK 125MM:** AD115, AD116, AD117, AD118, AD119, AD120, AD121, AD122, AD123, AD125, AD126

**KEY FEATURES:**

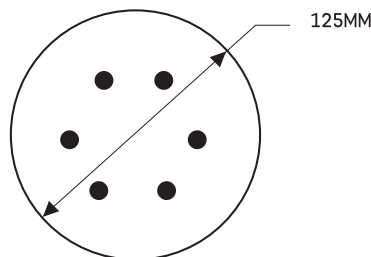
Safeline Hook and loop backing. High performance aluminium oxide grain. Punched sanding sheets  
 Strong and long lasting, easy to install and remove for use on wood, metal, plaster and filler.

**MATERIAL:**

Aluminium Oxide  
 This man-made material is suitable for shaping, sanding and polishing hard metal such as iron and steel, but also effective on timber. Aluminium oxide cuts much faster and lasts longer than glass or garnet.  
 It is available on non-waterproof, cloth or waterproof backings.

**SIZE CHART**

GRIT SIZE	GRADE	CODES	SIZE	APPLICATION
40-60	COARSE	PPA026, AD115, AD116, AD130, AD131	125MM DIA	MATERIAL REMOVAL
80-100	MEDIUM	PPA025, AD117, AD118, AD132, AD133	125MM DIA	LEVELING
120-UPWARDS	FINE	PPA024, AD119, AD120, AD121, AD122, AD123, AD124, AD125, AD126, AD134, AD135, AD136, AD137, AD138, AD139	125MM DIA	FINISHING
ASSORTED	FINE, MEDIUM, COARSE	PPA027	125MM DIA	


**STORAGE**

IT IS RECOMMENDED THAT ALL COATED ABRASIVE PRODUCTS SHOULD BE STORED AT CONSTANT LEVELS OF TEMPERATURE AND HUMIDITY WITHIN THE RANGES OF 18-22°C, 50-65% RH. THEY SHOULD BE KEPT AWAY FROM DAMP (OR COLD) WALLS, WINDOWS OR FLOORS TO AVOID POSSIBLE MOISTURE ABSORPTION. EQUALLY STORAGE ADJACENT TO HEAT SOURCES E.G. STEAM PIPES, RADIATORS, HOT AIR DUCTS, OVENS, ETC.,

