



### PRODUCT NAME:

WALL MOUNTED SOCKETS

### PRODUCT CODE/S:


EL2126 : 16AMP 220V SOCKET WALL MOUNTED  
 EL2127 : 16AMP 110V SOCKET WALL MOUNTED  
 EL2128 : 32AMP 110V SOCKET WALL MOUNTED  
 EL2139: 32AMP 220V WALL MOUNTED SOCKET

### KEY FEATURES:

WATERPROOF,DUSTPROOF, CORROSION AND AGING RESISTANT,FLAME RETARDANT, HIGH TEMPERATURE RESISTANT  
 1 X 3 PIN INDUSTRIAL FIELD PLUG AND SOCKET  
 WIDE APPLICATIONS: CARAVANS, WORK SHOP CAMPING, MOTOR HOMES, POWER TOOLS, OUTSIDE LIGHTING AND COMPRESSOR, ETC.  
 IP44 (SPASH/ WEATHER PROOF)  
 CONDUCTING MATERIAL: SOLID COPPER CYLINDER

### DETAILS:

<b>BODY MATERIAL</b>	Thermoplastic Body
<b>BRAND</b>	SAFELINE
<b>CABLE ENTRY POINTS</b>	TOP & REAR
<b>Earth Position</b>	6h
<b>Hertz (Hz)</b>	50/60 Hz
<b>IP Rating</b>	IP44
<b>Product Code</b>	EL2126-28 / EL2139
<b>Mount Type</b>	Surface-Mounted
<b>Pack Size</b>	1
<b>Pieces in Pack/Case</b>	1
<b>Product Type</b>	Surface Socket
<b>Suitable Cable Size</b>	18 mm
<b>Switched/Unswitched</b>	Unswitched
<b>Water Resistant</b>	Splashproof

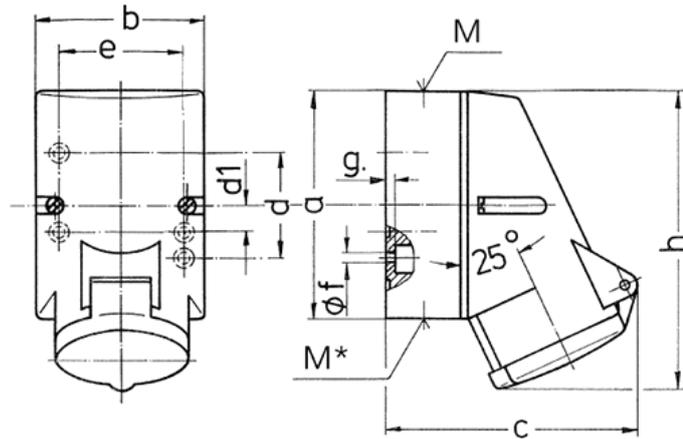

Drawing 1 MB 209 Dim. in mm	Amp. Poles	16		
		3	4	5
a		87	100	100
b		64	75	75
c		99	110	113
d		40	-	-
d1		-	11	11
e		50	59	59
f		4.5	5	5
g		4	4	4
h		115	125	128
M		20	20	20
M*		M20 (blind) to be cut out		
Max. cable diam. (mm)		15	15	15
Terminal for cond. cross section (mm <sup>2</sup> ) min.-max.		1.5 —4	1.5 —4	1.5 —4

### STORAGE

**CE IP44**