


PRODUCT NAME:

SAFELINE FIRE RATED ALUMINIUM FOIL TAPE

PRODUCT CODE/S:

 75mmX50 MTR : AT06
 50mm X 50MTR : AT06A

KEY FEATURES:

Aluminium Foil Tape is a 30u nominal dead soft aluminium foil with aggressive flame-retardant acrylic adhesive and protected by easy release liner.

Features

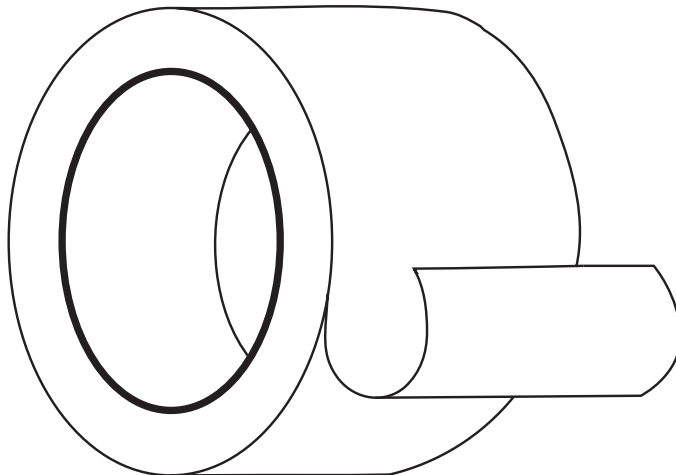
Excellent Peel Adhesion Good Initial Tack & Permanent Bonding UL723 Fire Rating Approval, Outstanding Temperature & Aging Resistance

MATERIAL:

Consisting of a dead soft, thermally conductive aluminum backing and high engineered acrylic adhesive

USES:

Super performance, UL 723 FR grade 30u foil tape. Ideal for sealing joints/seams against moisture and vapour on foil jacketing insulation. Suitable for many other permanent sealing, holding, splicing or masking applications requiring the protection offered by a foil backing.

DETAILS:


MATERIAL:	DEAD SOFT ALUMINUM FOIL
ELONGATION AT BREAK:	8%
TEMPERATURE USE RANGE:	-65° TO 300°F (-54° TO 149°C)
BACKING THICKNESS:	2.8 MILS (0.07 MM)
TENSILE STRENGTH:	30 lbs./in. width
COLOUR:	SILVER
BOX QTY (75MM)	24
BOX QTY (50MM)	36
SIZE	75 X 50M
SIZE	50 X 50M

STORAGE

STORE UNDER NORMAL CONDITIONS OF 60° TO 80°F (16° TO 27°C) AND 40 TO 60% R.H. IN THE ORIGINAL CARTON.