



**PRODUCT NAME:**

ALUMINIUM OXIDE FIBRE DISCS

**PRODUCT CODE/S:**

AD010, AD014, AD017, AD018, AD019, AD020, AD021, AD022, AD023, AD024, AD025, AD032, AD033, AD034, AD035, AD036, AD040, AD041, AD042, AD043, AD044, AD045, AD046, AD047


**KEY FEATURES:**

High quality abrasive grain, resin on resin bonded to a vulcanized fibre backing.  
Vulcanized fibre backing  
Strong, long life

**MATERIAL:**

Aluminium Oxide

**SIZE CHART**

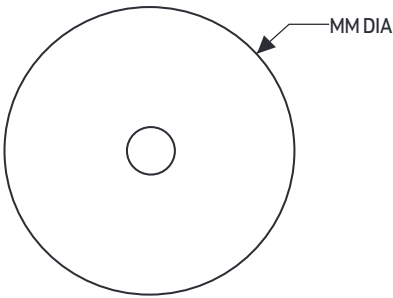

CODE	GRIT	SIZE (DIA X BORE)
AD010	16	100MM X 16MM
AD014	60	100MM X 16MM
AD017	120	100MM X 16MM
AD018	16	115MM X 22MM
AD019	24	115MM X 22MM
AD020	36	115MM X 22MM
AD021	50	115MM X 22MM
AD022	60	115MM X 22MM
AD023	80	115MM X 22MM
AD024	100	115MM X 22MM
AD025	120	115MM X 22MM
AD032	36	150MM X 22MM
AD033	50	150MM X 22MM
AD034	60	150MM X 22MM
AD035	80	150MM X 22MM

CODE	GRIT	SIZE (DIA X BORE)
AD032	36	150MM X 22MM
AD033	50	150MM X 22MM
AD034	60	150MM X 22MM
AD035	80	150MM X 22MM
AD040	16	180MM X 22MM
AD041	24	180MM X 22MM
AD042	36	180MM X 22MM
AD043	50	180MM X 22MM
AD044	60	180MM X 22MM
AD045	80	180MM X 22MM
AD046	100	180MM X 22MM
AD047	120	180MM X 22MM

**STORAGE**

IT IS RECOMMENDED THAT ALL COATED ABRASIVE PRODUCTS SHOULD BE STORED AT CONSTANT LEVELS OF TEMPERATURE AND HUMIDITY WITHIN THE RANGES OF 18-22°C, 50-65% RH. THEY SHOULD BE KEPT AWAY FROM DAMP (OR COLD) WALLS, WINDOWS OR FLOORS TO AVOID POSSIBLE MOISTURE ABSORPTION. EQUALLY STORAGE ADJACENT TO HEAT SOURCES E.G. STEAM PIPES, RADIATORS, HOT AIR DUCTS, OVENS, ETC.,

