


PRODUCT NAME:

VELCRO DISCS NO HOLES - 150MM

PRODUCT CODE/S:

PREPACKED 5 PER PACK 150MM: PPA028, PPA029, PPA030, PPA031
50 PER PACK 150MM: AD102, AD103, AD104, AD106, AD107, AD108, AD109, AD112
50 PER PACK 125MM: AD140, AD141, AD143, AD145, AD146, AD147

KEY FEATURES:

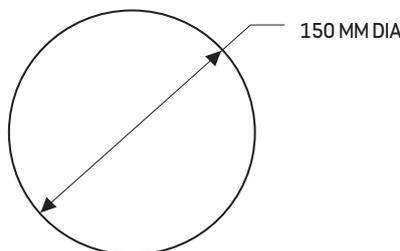
Safeline Hook and loop backing. High performance aluminium oxide grain.
 Punched sanding sheets
 Strong and long lasting, easy to install and remove
 for use on wood, metal, plaster and filler.

MATERIAL:
Aluminium Oxide

This man-made material is suitable for shaping, sanding and polishing hard metal such as iron and steel, but also effective on timber. Aluminium oxide cuts much faster and lasts longer than glass or garnet.
 It is available on non-waterproof, cloth or waterproof backings.

SIZE CHART

GRIT SIZE	GRADE	CODES	SIZE	APPLICATION
40-60	COARSE	PPA030, AD101	150MM DIA	MATERIAL REMOVAL
80-100	MEDIUM	PPA029, AD103, AD104	150MM DIA	LEVELING
120-UPWARDS	FINE	PPA028, AD105, AD106, AD107, AD108, AD109, AD112	150MM DIA	FINISHING
ASSORTED	FINE, MEDIUM, COARSE	PPA031	150MM DIA	
40-60	COARSE	AD140, AD141	125MM DIA	MATERIAL REMOVAL
80-100	MEDIUM	AD142, AD143	125MM DIA	LEVELING
120-UPWARDS	FINE	AD144, AD146, AD147	125MM DIA	FINISHING
ASSORTED	FINE, MEDIUM, COARSE		125MM DIA	


STORAGE

IT IS RECOMMENDED THAT ALL COATED ABRASIVE PRODUCTS SHOULD BE STORED AT CONSTANT LEVELS OF TEMPERATURE AND HUMIDITY WITHIN THE RANGES OF 18-22°C, 50-65% RH. THEY SHOULD BE KEPT AWAY FROM DAMP (OR COLD) WALLS, WINDOWS OR FLOORS TO AVOID POSSIBLE MOISTURE ABSORPTION. EQUALLY STORAGE ADJACENT TO HEAT SOURCES E.G. STEAM PIPES, RADIATORS, HOT AIR DUCTS, OVENS, ETC.,

